


<b>Patent number:</b>	DE10065099
<b>Publication date:</b>	2002-07-18
<b>Inventor:</b>	STIBE ARMIN (DE)
<b>Applicant:</b>	LOGOS INNOVATIONEN GMBH (DE)
<b>Classification:</b>	
- international:	B66B5/28; B66B13/24
- european:	B66B5/00
<b>Application number:</b>	DE20001065099 20001228
<b>Priority number(s):</b>	DE20001065099 20001228

The protective arrangement (1) has a supporting element (2) for bringing into a securing position and a non-securing position, in both of which positions it is essentially parallel to a direction of travel (VF) of the elevator cabin (10) or capsule. An actuating unit has at least two pivoting levers (5a,5b) arranged as a parallelogram on the supporting element to pivot it in and out.

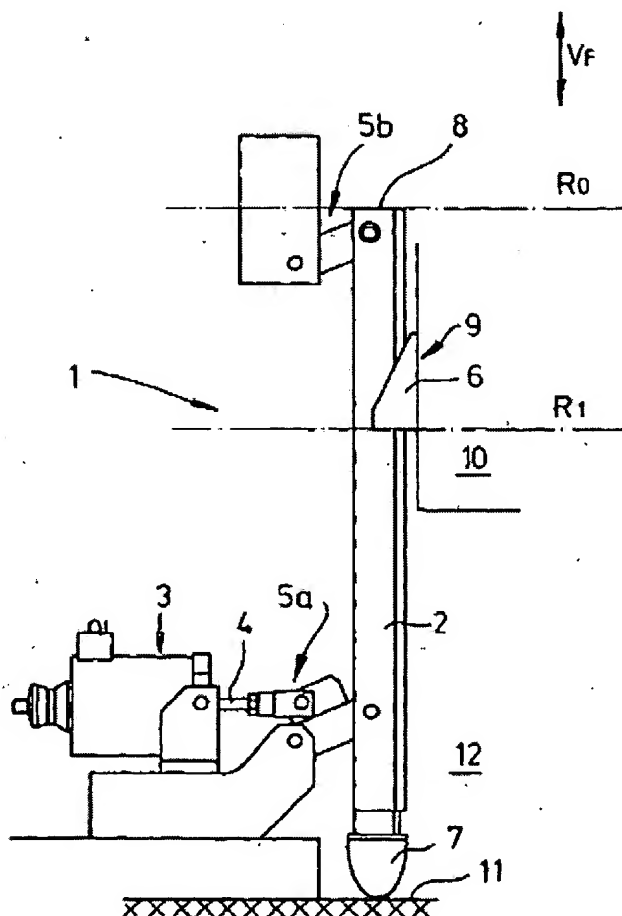

Express Mail Label  
No. EV 343718945 US